


Floodlights BAT85 Series Explosion-proof Floodlights



- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 1, Groups A, B, C, D
- ◆ Enclosure in Copper-free Aluminium Alloy, powder coated surface, yellow (RAL1021).
- ◆ Integral control gear, easy installation and maintenance.
- ◆ Toughened glass cover resistant to temperature changes.
- ◆ The light fittings are supplied without lamp. PHILIPS lamps are recommended.
- ◆ Both American standard and European standard are available.

Catalogue number logic

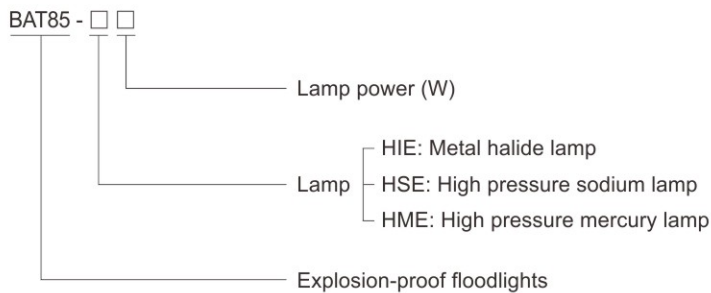


Photometric data

BAT85-□□

Rated luminous flux

- 70W Metal halide lamp: 10500 lm
 - 100W Metal halide lamp: 10500 lm
 - 150W Metal halide lamp: 10500 lm
 - 250W Metal halide lamp: 25000 lm
 - 70W High pressure sodium lamp: 18000 lm
 - 100W High pressure sodium lamp: 18000 lm
 - 150W High pressure sodium lamp: 18000 lm
 - 250W High pressure sodium lamp: 33200 lm
 - 80W High pressure mercury lamp: 13000 lm
 - 125W High pressure mercury lamp: 13000 lm
 - 250W High pressure mercury lamp: 13000 lm
 - 400W Metal halide lamp: 42500 lm
 - 400W High pressure sodium lamp: 56500 lm
 - 400W High pressure mercury lamp: 22000 lm
- The data from Philips lamp

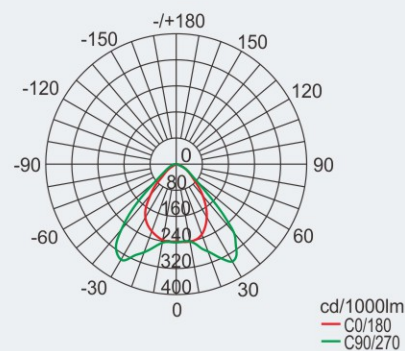

We can provide lighting design and data by professional lighting software DIALUX based upon simulated site situation on request

Zones 1&2; 21&22

Floodlights BAT85 Series Explosion-proof Floodlights

Technical data	
Explosion-proof floodlights	BAT85-□□
Explosion protection	IECEX CQM 11.0013 Ex db IIC T3 or xxx°C ¹⁾ Gb Ex tb IIC Txxx°C ¹⁾ Db IP66 TUV CY 18 ATEX 0206017X ⊕ II 2 G Ex db IIC T3 or xxx°C ¹⁾ Gb ⊕ II 2 D Ex tb IIC Txxx°C ¹⁾ Db IP66 ¹⁾ See Selection table
Global (IECEX) Gas and dust	
Europe (ATEX) Gas and dust	
Certificates	IECEX; ATEX; CU-TR
Conformity to standards	EN 60079-0, EN 60079-1, EN 60079-31, IEC 60079-0, IEC 60079-1, IEC 60079-31
Material	Copper-free Aluminium Alloy, powder coated surface, yellow (RAL1021)
Enclosure	Toughened glass, stands 4J impact
Glass cover	Electromagnetic ballast, rapid starting, stable performance
Ballast	General trigger
Trigger	COS φ ≥ 0.90 (compensated)
Power factor	High-purity aluminium
Internal reflector	Stainless steel
Exposed fastener	
Lamp	
Lamp holder	European standard: E27, American standard: E26
Available lamp	Metal halide lamp (HIE): 70W, 100W, 150W High pressure sodium lamp (HSE): 70W, 100W High pressure mercury lamp (HME): 80W, 125W
	European standard: E40, American standard: E39
Lamp holder	Metal halide lamp (HIE): 250W, 400W
Available lamp	High pressure sodium lamp (HSE): 150W, 250W, 400W High pressure mercury lamp (HME): 250W, 400W
Rated voltage	European standard: 120V, 208V, 220~240V, 250V, 277V AC 50Hz (60Hz is optional) American standard: 120V, 208V, 220~240V, 250V, 277V AC 60Hz (50Hz is optional)
Earthing protection	M5 (internal & external earth bolts)
Degree of protection	IP66
Ambient temperature	-20°C~+55°C
Terminal	3 x 1.5~4mm ² (L+N+PE)
Cable entries	2 x M25 x 1.5 plugs
Cable gland (optional)	DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P7/20~29.
Weight	European standard: 28.50kg American standard: 31.40kg

Selection table				Dimension drawings (all dimensions in mm) - subject to alteration			
Rated voltage	Lamp	Lamp power (W)	Temperature classes				
			-20°C ≤ Ta ≤ +40°C		-20°C ≤ Ta ≤ +55°C		
			Gas	Dust	Gas	Dust	
120V AC 50/60Hz	HIE	70, 100, 150, 250, 400	T3	190°C	T3	190°C	
	HSE	70, 100, 150, 250, 400	T3	190°C	T3	190°C	
208/220V AC 50/60Hz	HIE	70, 100, 150, 250, 400	T3	190°C	T3	190°C	
	HME	80, 125, 250, 400	T3	190°C	T3	190°C	
230V AC 50/60Hz	HSE	70, 100, 150, 250, 400	T3	190°C	T3	190°C	
	HIE	70, 100, 150, 250, 400	T3	190°C	T3	190°C	
240V AC 50/60Hz	HME	80, 125, 250	T3	190°C	T3	190°C	
	HSE	70, 100, 150, 250	T3	190°C	206°C	206°C	
250V AC 50/60Hz	HIE	70, 100, 150, 250, 400	T3	190°C	T3	190°C	
	HME	80, 125, 250	T3	190°C	208°C	208°C	
277V AC 50/60Hz	HSE	70, 100, 150, 250	T3	190°C	T3	190°C	
	HIE	70, 100, 150, 250	T3	190°C	T3	190°C	
240V AC 50/60Hz	HME	80, 125, 250	T3	190°C	211°C	211°C	
	HSE	70, 100, 150, 250	T3	190°C	T3	190°C	
250V AC 50/60Hz	HIE	70, 100, 150, 250, 400	T3	190°C	T3	190°C	
	HME	80, 125, 250	T3	190°C	216°C	216°C	
277V AC 50/60Hz	HSE	70, 100, 150, 250	T3	190°C	T3	190°C	
	HIE	70, 100, 150, 250	T3	190°C	211°C	211°C	
240V AC 50/60Hz	HME	80, 125, 250	T3	190°C	226°C	226°C	
	HSE	70, 100, 150, 250	T3	190°C	T3	190°C	
250V AC 50/60Hz	HIE	70, 100, 150, 250	T3	190°C	T3	190°C	
	HME	80, 125, 250	T3	190°C	208°C	208°C	
277V AC 50/60Hz	HSE	70, 100, 150, 250	T3	190°C	T3	190°C	
	HIE	70, 100, 150, 250	T3	190°C	T3	190°C	
240V AC 50/60Hz	HME	80, 125, 250	T3	190°C	210°C	210°C	
	HSE	70, 100, 150, 250	T3	190°C	225°C	225°C	

