


Installation Switches BZM Series Explosion-proof Illumination Switches



- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 1, Groups A, B, C, D
- ◆ Copper-free Aluminium Alloy enclosure, powder coated surface.
- ◆ Two options:
 - On-off switch
 - Changeover switch

■ Catalogue number logic

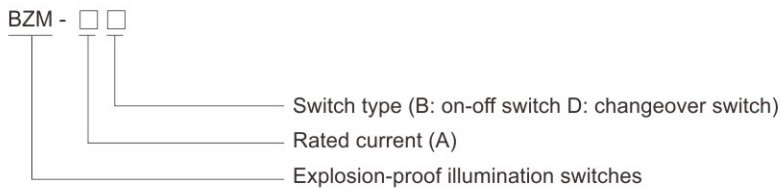

Selection table

Type/Ordering code	Chart of contact	Corresponding switch	Weight (kg)																														
BZM-16B	<table border="1"> <tr> <td></td> <td>0</td> <td>I</td> <td>0</td> <td>I</td> </tr> <tr> <td></td> <td>0°</td> <td>90°</td> <td>180°</td> <td>270°</td> </tr> <tr> <td>1°</td> <td></td> <td>x</td> <td></td> <td>x</td> </tr> <tr> <td>3°</td> <td></td> <td>x</td> <td></td> <td>x</td> </tr> <tr> <td>5°</td> <td></td> <td>x</td> <td></td> <td>x</td> </tr> <tr> <td>7°</td> <td></td> <td>x</td> <td></td> <td>x</td> </tr> </table>		0	I	0	I		0°	90°	180°	270°	1°		x		x	3°		x		x	5°		x		x	7°		x		x		0.85
	0	I	0	I																													
	0°	90°	180°	270°																													
1°		x		x																													
3°		x		x																													
5°		x		x																													
7°		x		x																													
BZM-25B	<table border="1"> <tr> <td></td> <td>0</td> <td>I</td> <td>0</td> <td>I</td> </tr> <tr> <td></td> <td>0°</td> <td>90°</td> <td>180°</td> <td>270°</td> </tr> <tr> <td>1°</td> <td></td> <td>x</td> <td></td> <td>x</td> </tr> <tr> <td>3°</td> <td></td> <td>x</td> <td></td> <td>x</td> </tr> <tr> <td>5°</td> <td></td> <td>x</td> <td></td> <td>x</td> </tr> <tr> <td>7°</td> <td></td> <td>x</td> <td></td> <td>x</td> </tr> </table>		0	I	0	I		0°	90°	180°	270°	1°		x		x	3°		x		x	5°		x		x	7°		x		x		0.95
	0	I	0	I																													
	0°	90°	180°	270°																													
1°		x		x																													
3°		x		x																													
5°		x		x																													
7°		x		x																													
BZM-16D	<table border="1"> <tr> <td></td> <td>0</td> <td>I</td> </tr> <tr> <td></td> <td>0°</td> <td>90°</td> </tr> <tr> <td>1/3°</td> <td>x</td> <td></td> </tr> <tr> <td></td> <td></td> <td>x</td> </tr> </table>		0	I		0°	90°	1/3°	x				x		0.85																		
	0	I																															
	0°	90°																															
1/3°	x																																
		x																															
BZM-25D	<table border="1"> <tr> <td></td> <td>0</td> <td>I</td> </tr> <tr> <td></td> <td>0°</td> <td>90°</td> </tr> <tr> <td>1/3°</td> <td>x</td> <td></td> </tr> <tr> <td></td> <td></td> <td>x</td> </tr> </table>		0	I		0°	90°	1/3°	x				x		0.95																		
	0	I																															
	0°	90°																															
1/3°	x																																
		x																															

Zones 1&2; 21&22

Installation Switches BZM Series Explosion-proof Illumination Switches

Technical data

Explosion-proof illumination switches BZM-□□

Explosion protection

Global (IECEX)	IECEX LCI 08. 0008
Gas and dust	Ex d IIC T6 Gb Ex tb IIIC T80°C Db
Europe (ATEX)	LCIE 06 ATEX 6068
Gas and dust	⊕ II 2 G Ex d IIC T6 Gb ⊕ II 2 D Ex tb IIIC T80°C Db

Certificates

Conformity to standards

IECEX; ATEX; CU-TR
EN 60079-0, EN 60079-1, EN 60079-31
IEC 60079-0, IEC 60079-1, IEC 60079-31

Enclosure material

Enclosure colour

Switch function

Exposed fastener

Rated voltage

Rated current

Degree of protection

Ambient temperature

Internal&external earthing



Cable connection

Cable entries

Cable gland(optional)

Copper-free Aluminium Alloy, powder coated surface
Window grey (RAL7040)
On-off switch or changeover switch
Stainless steel
Max. 250V AC
16A, 25A
IP66
-60°C~+60°C
M5/M5
3 x (2.5~4)mm²
Standard 2 x M25 x 1.5 plugs
2 x NPT3/4" plugs on request
DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P7/20~31.

Spare parts

Built-in switch	Rated voltage/current	Ordering code	Weight (kg)
	250V/16A	30001	0.10
	250V/25A	30002	0.20
	250V/16A	30003	0.10
	250V/25A	30004	0.20



Dimension drawings (all dimensions in mm) - subject to alteration

